

600x1200mm GLAZED VITRIFIED TILES





when,

Ceramic blends with innovation, innovation in ceramic happens.

We have specialisation in manufacturing high-quality VITRIFIED and WALL TILES for every possible Architectural, Residential and Commercial use.

Colortile is one of the leading manufacturers of Glazed Vitrified Tiles and Ceramic Body Tiles in India. For over a decade now, Colortile has been innovating and manufacturing Floor and Wall Tiles with an aim to excel in the tile field and also to satisfy its ever-increasing client base.

We have installed a production capacity of over 22 million square meters per annum, spread over 3 manufacturing units at Morbi, Gujarat, India. Our factories are well-equipped with state-of-the-art technology and modernised laboratories to keep us ahead of the curve.

Mission

We manufacture wall and floor tiles that rank high on quality and aesthetic value irrespective of the place where they are applied. We are the first choice of residential, commercial and public buildings for indoor and outdoor applications. We forge a long-term partnership with all our clients by providing them excellent service. We keep our ears close to the ground to satisfy the needs of an evolving market.

Vision


Always putting the bar high and the dream to achieve them with all the dynamism in designs, we have invested in the latest technology to make COLORTILE a top-notch brand in the tile world. We, at COLORTILE family promise ourselves to grow, innovate and maintain the quality forever.

Inspiration



The perfect marriage between the natural beauty of the Earth and technologically advanced creations of ceramic to build a space with modern aesthetics.

Innovation

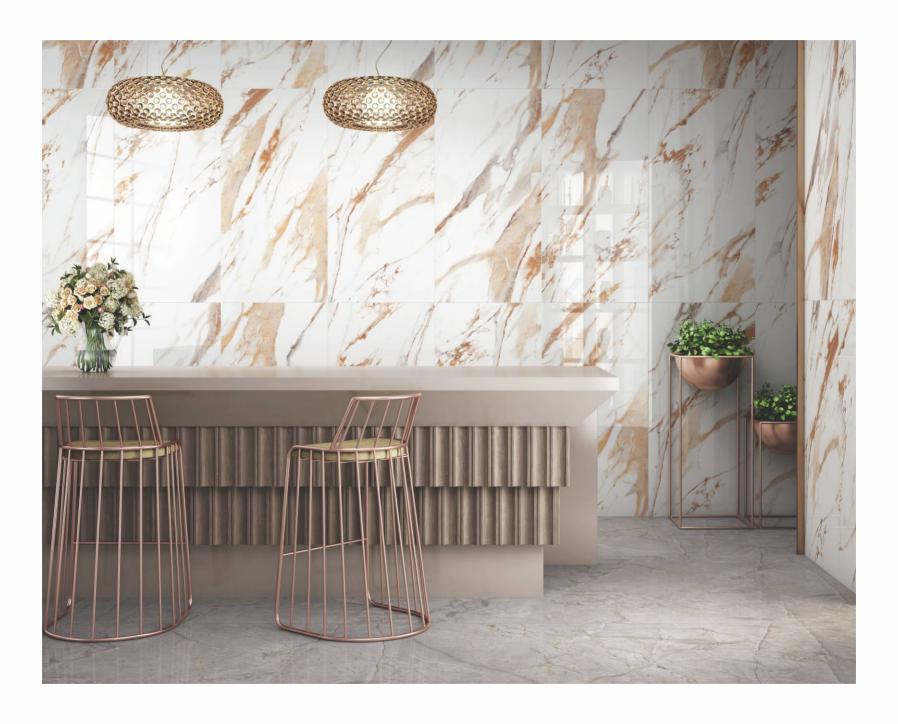

Inspired from the beauty and natural stone around the world.

The Indian consumer is becoming more and more design & decor conscious by the day. A home is no more a necessity but it is a reflection of one's status, personality & taste. Therefore, the demand for premium quality vitrified tiles with beautiful designs and perfect craftsmanship has increased by leaps & bounds. COLORTILE presents a unique collection

of Glazed Vitrified Tiles to fulfill the ever-expanding needs and expectations of the Indian consumer. COLORTILE range of Glazed Vitrified Tiles in an extensive array of exclusive designs in the 600x1200mm size available through a wide distribution network.

GLAZED VITRIFIED TILES SOOx1600mm 600x1200mm 600x600mm Wall Floor Recommended

Application areas



Residential



Commercial Building



Hotel, Café & Restaurant



Gymnasium



Hall & Corridor



Super Market & Mall



Hospital



Airport



School & College



Industry



Spa & Wellness Centres



Religious Place

Technical specification



Long Durability



Easy to Clean



Impact Resistance



Frost Resistance



Low Water Absorption



Dimensional Stability



Hygienic Surface



Fire Resistance



Chemical Resistance



Easy Installation



Thermal Shock Resistance



Crazing Resistance

Table of Content





Sizes



800x1600mm



600x1200mm

Finish

- SAND



Ceppo Clay







Sizes



800x1600mm



600x1200mm

Finish

- SAND



Ceppo Bianco







Sizes




800x1600mm




600x1200mm

Finish

- SAND

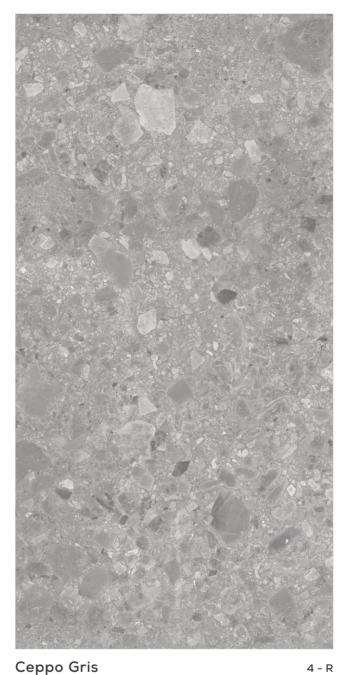

Ceppo Gris

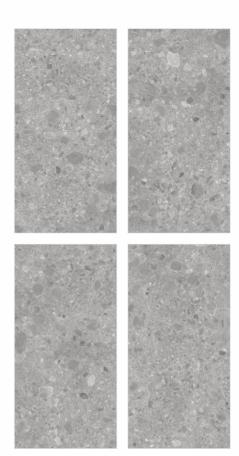





Sizes




800x1600mm




600x1200mm

Finish

- SAND

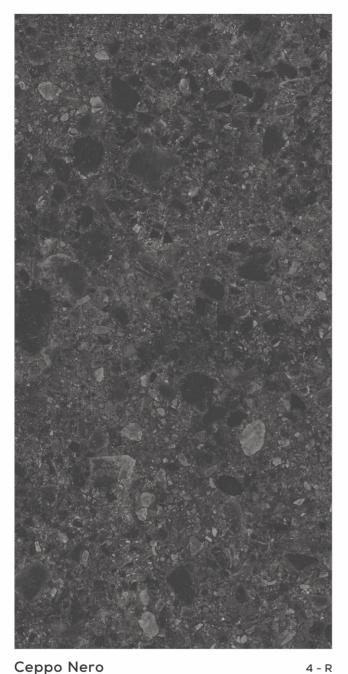



Ceppo Nero

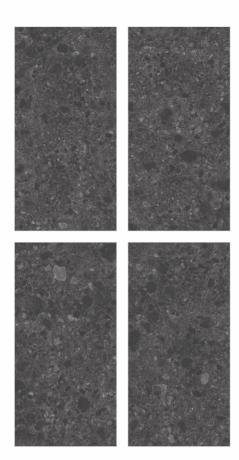








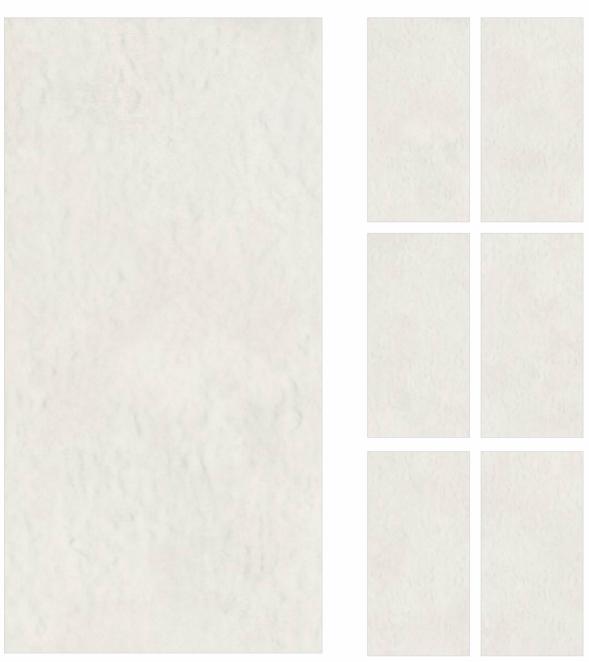


6 - R

Beton Shell






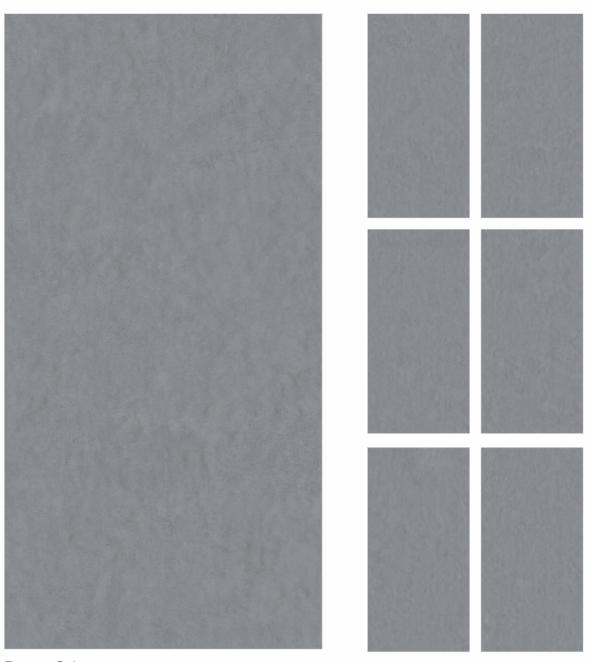


Beton Gris 6 - R



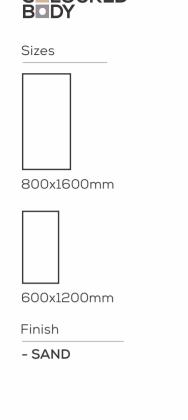





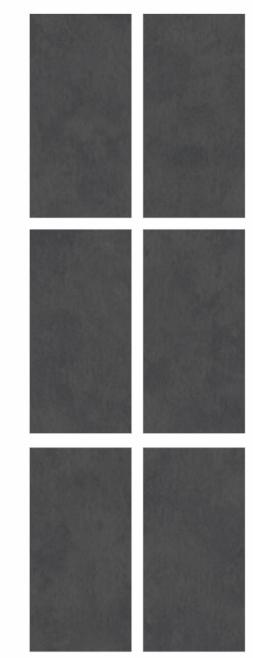

Beton Nero




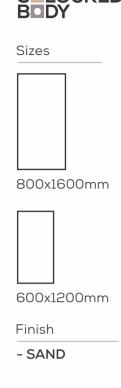

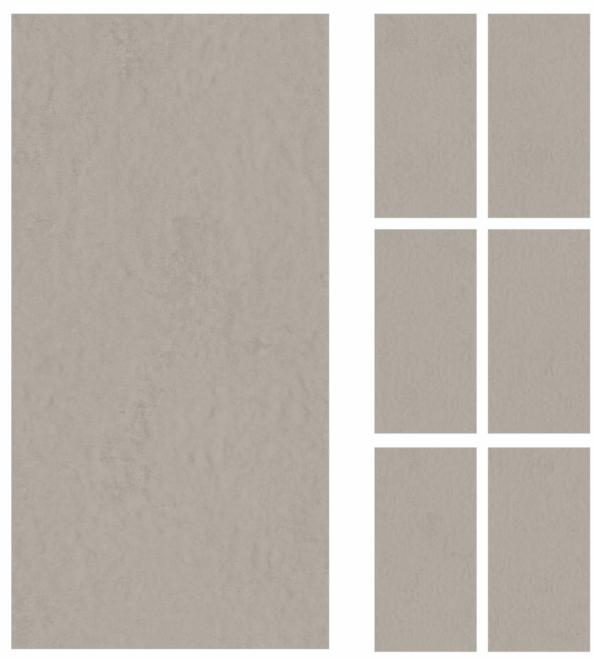




Beton Ozark | Size - 600x1200mm | Finish - Sand

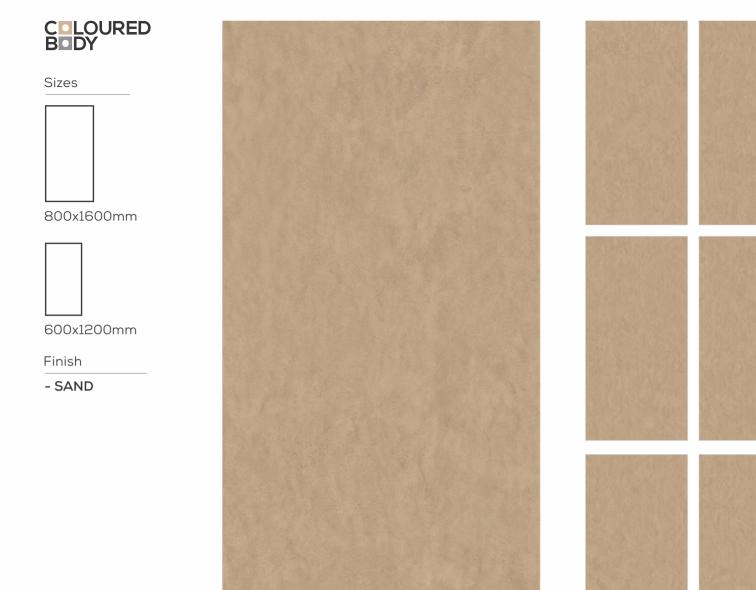

Beton Camel

6 - R



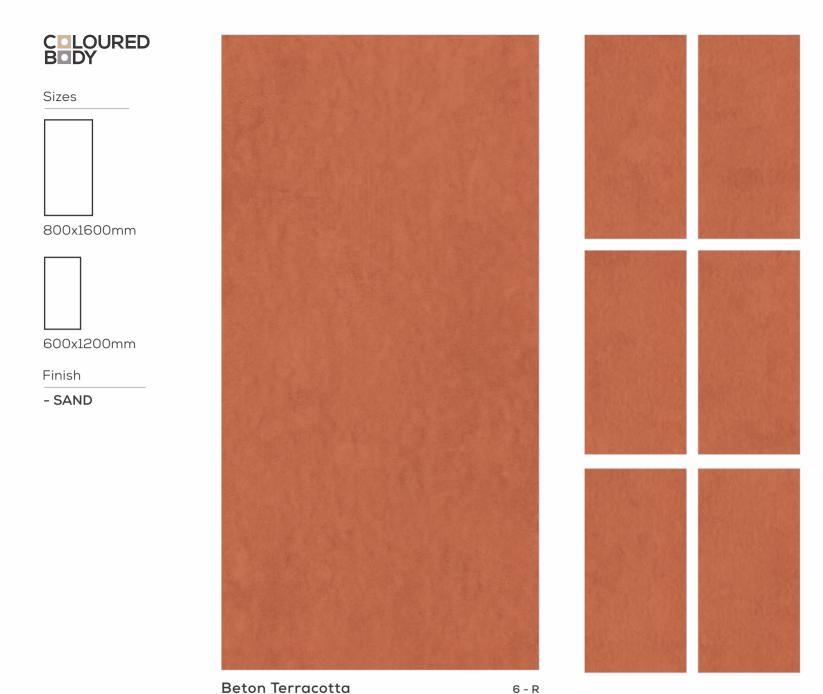



| Sizes | |
|---------------|--|
| | |
| 600x1200mm | |
| 600x600mm | |
| Finish | |
| - RELIEF MATT | |
| | |

4 - R

Parker Bianco




Sizes 600x1200mm 600x600mm Finish - RELIEF MATT

4 - R

Parker Gris




Sizes 600x1200mm 600x600mm Finish - RELIEF MATT

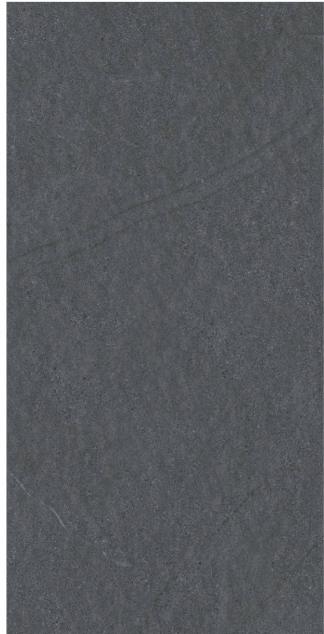





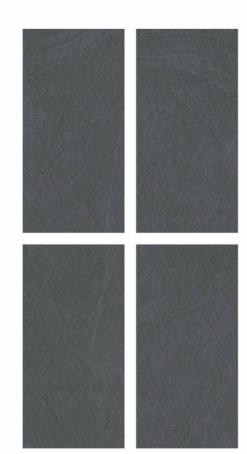




| Sizes | | | |
|---------------|--|--|--|
| | | | |
| 600x1200mm | | | |
| 600x600mm | | | |
| Finish | | | |
| - RELIEF MATT | | | |
| | | | |

4 - R

Parker Crema

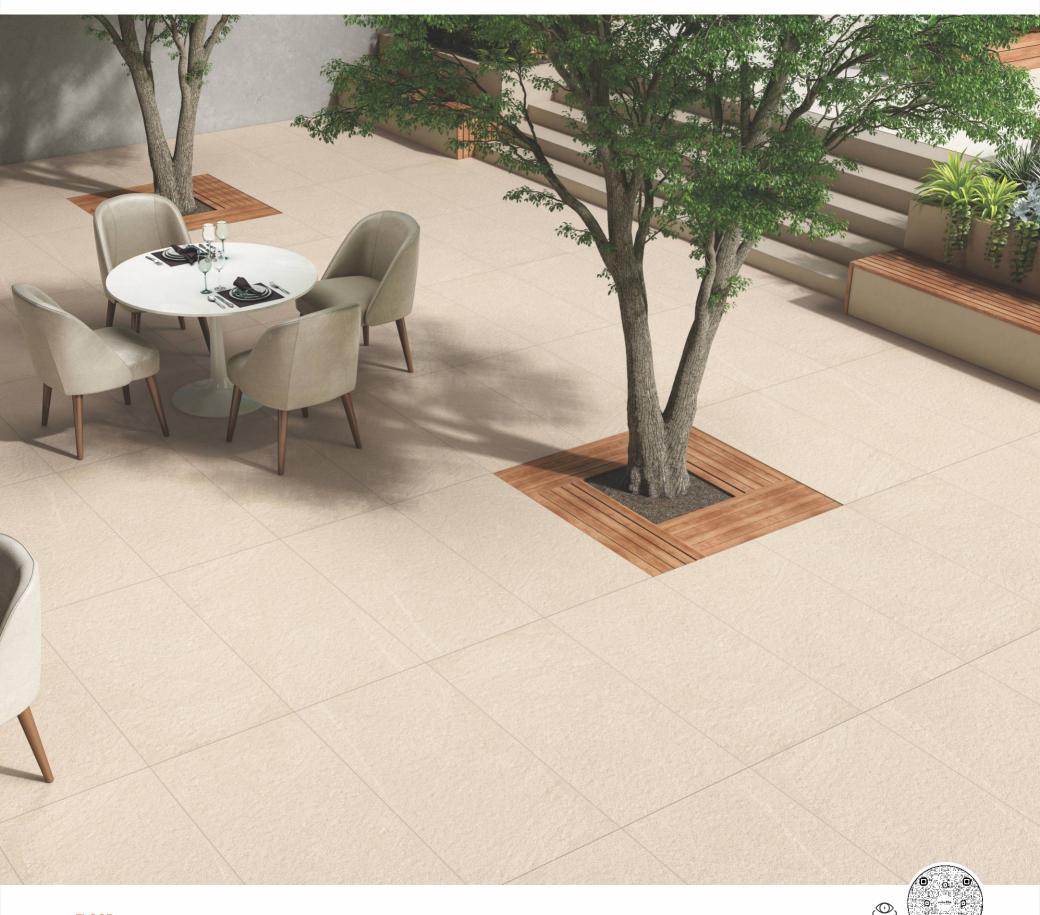

Sizes 600x1200mm 600x600mm Finish - RELIEF MATT

4 - R

Parker Taupe






Finish



Terratile Grey

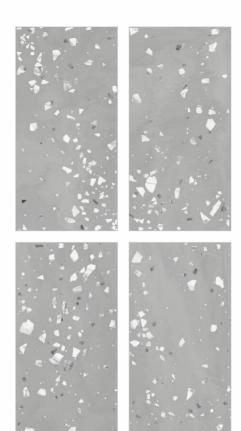






Finish



Terratile Nero

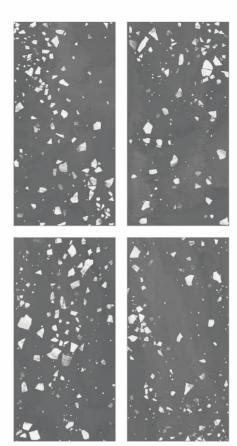






Finish



Terratile Viola

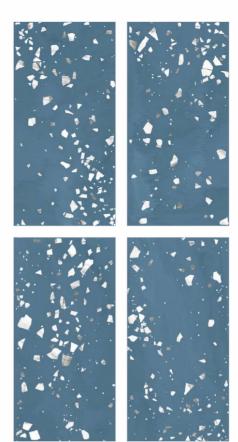






Finish



Terratile Verde

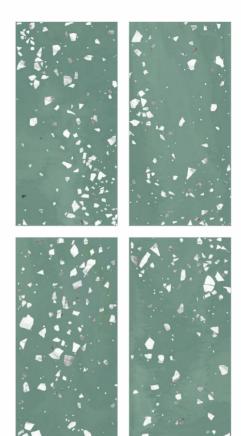





Finish



Terratile Rosso








- RUSTIC MATT
- GLOSSY



Onyx Pink Crush



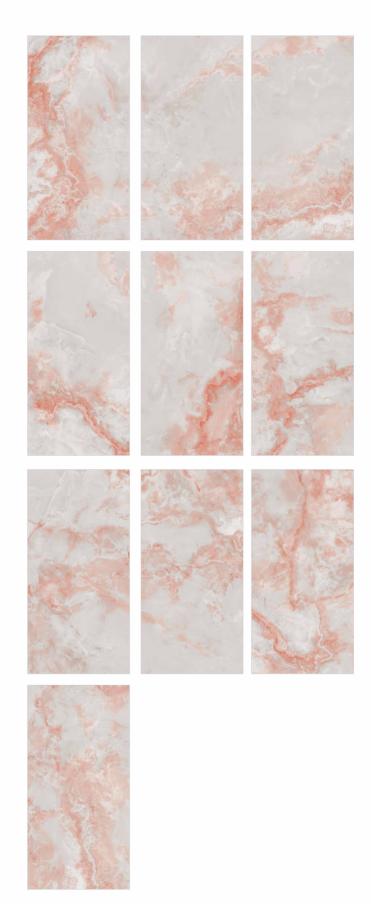





- GLOSSY
- RUSTIC MATT




Onyx Sea Blue







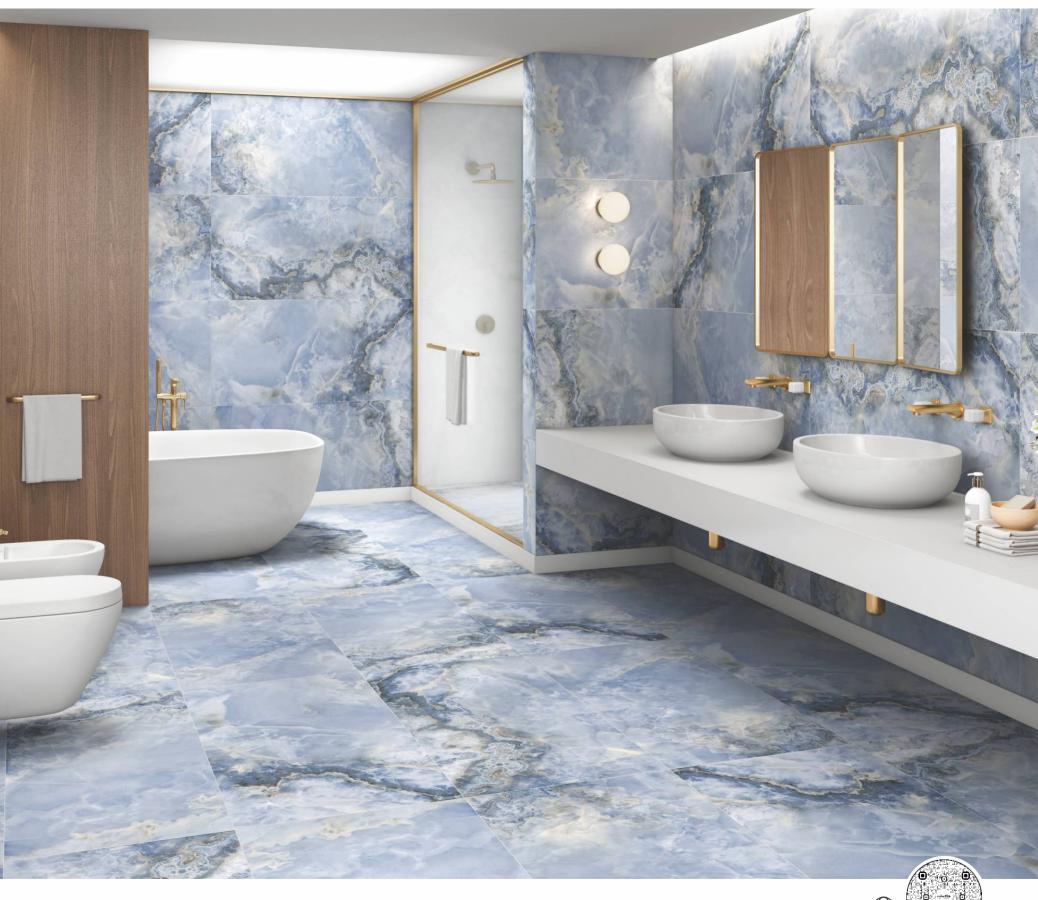





- GLOSSY
- RUSTIC MATT



Onyx Sunspot



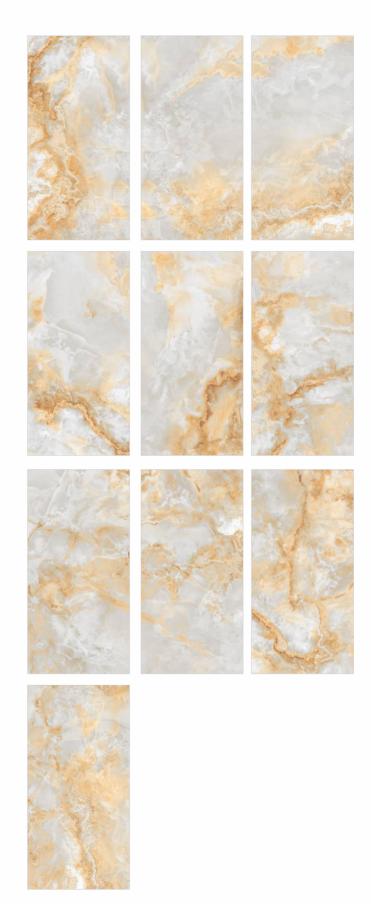

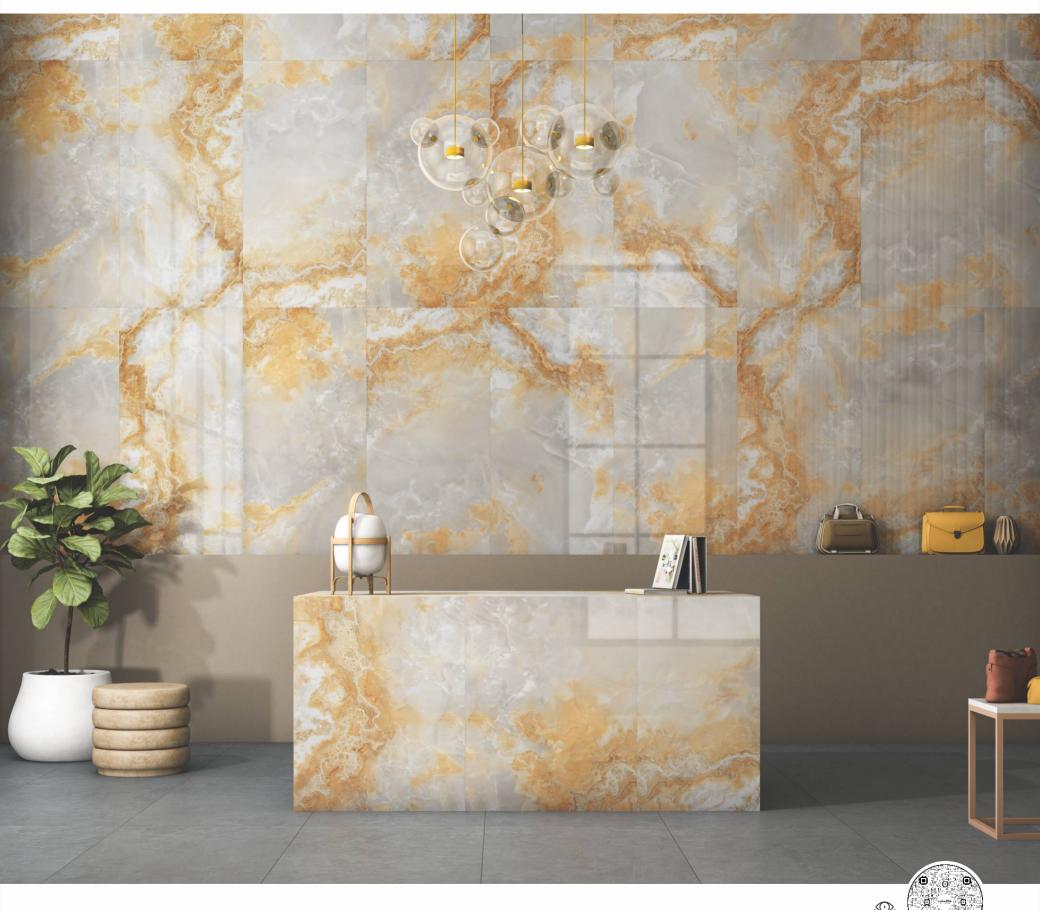





- GLOSSY
- RUSTIC MATT



Onyx Verde 10 - R

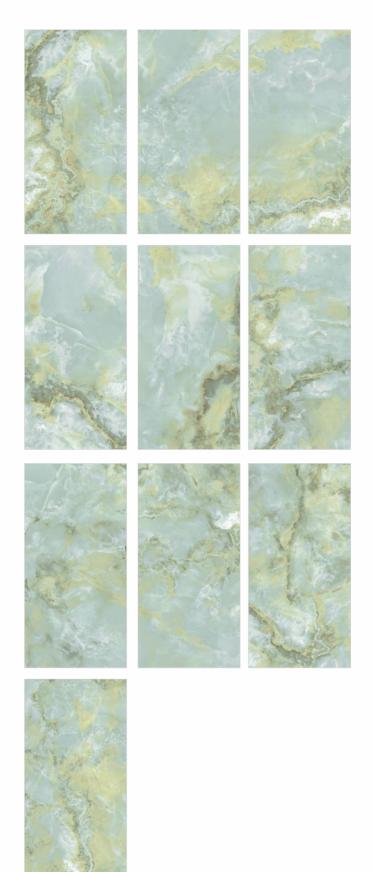

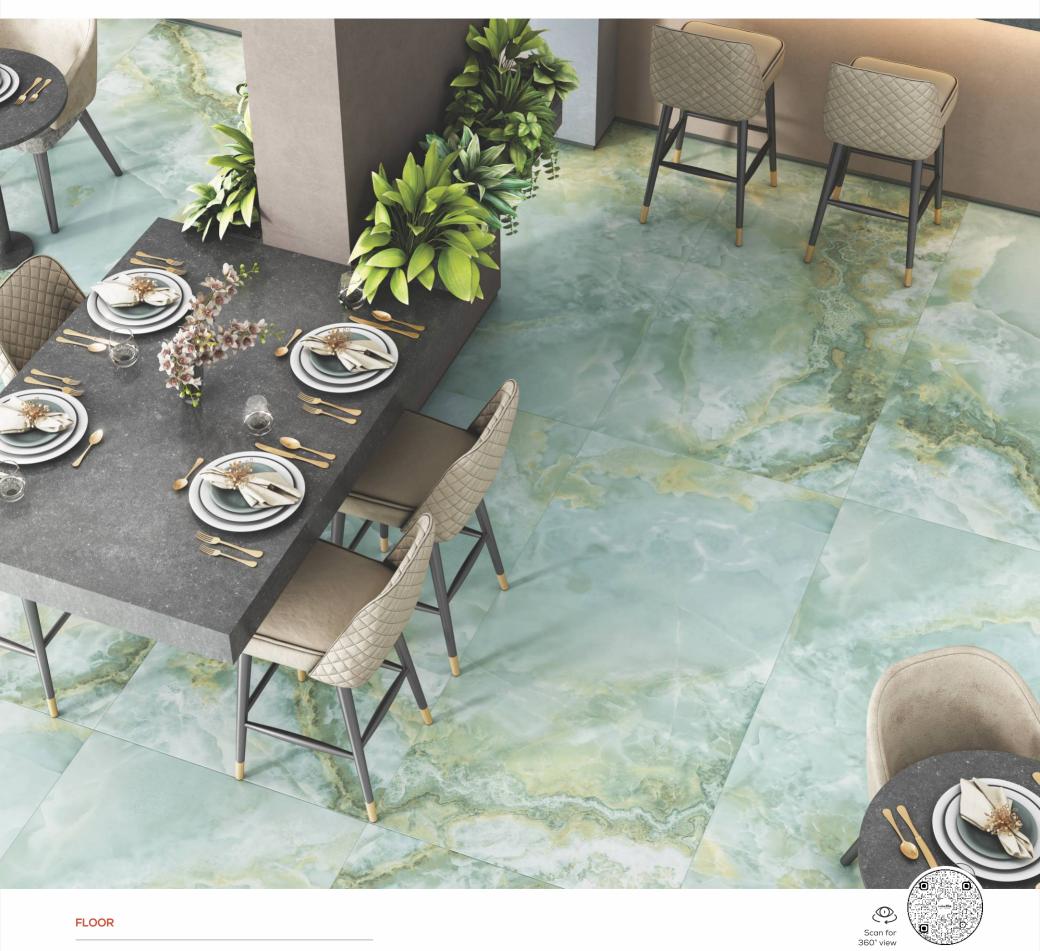




Finish

- GLOSSY
- RUSTIC MATT



Onyx Silver



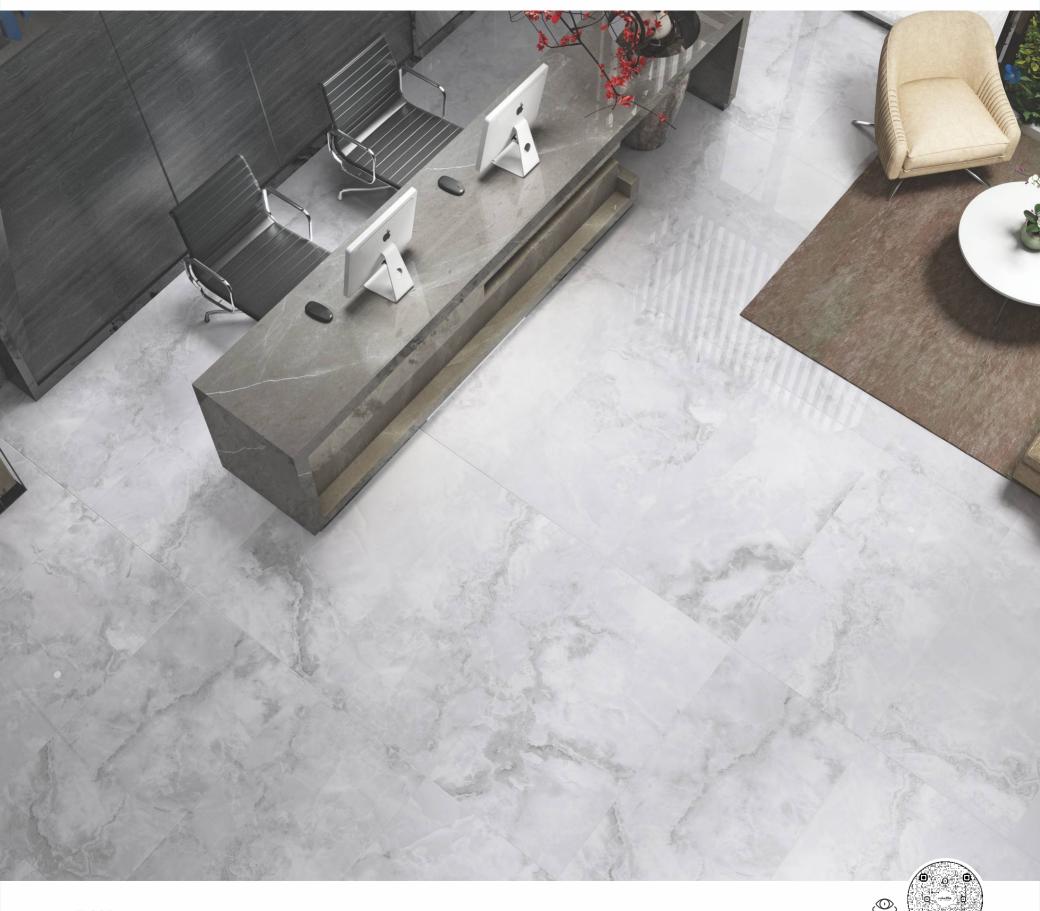



Finish

- GLOSSY
- RUSTIC MATT



Statuario Royal



5 - R




FARMATCH







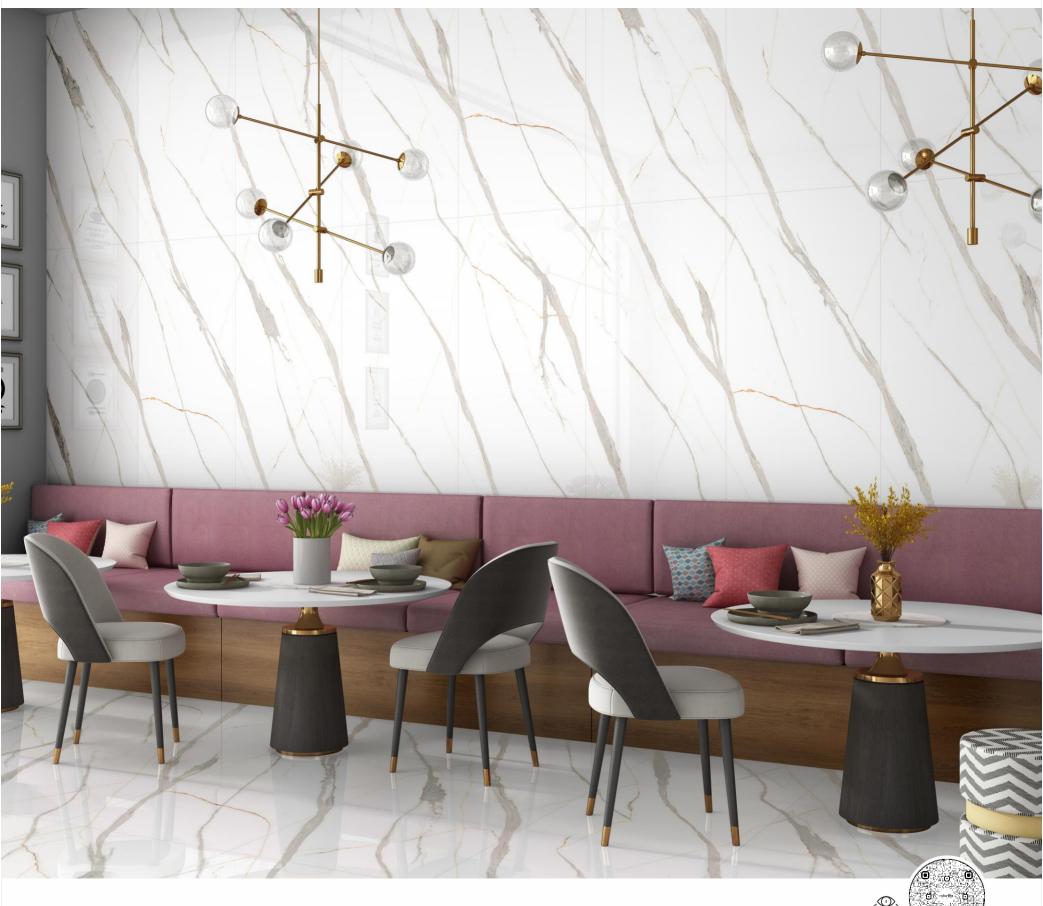



Finish


- GLOSSY









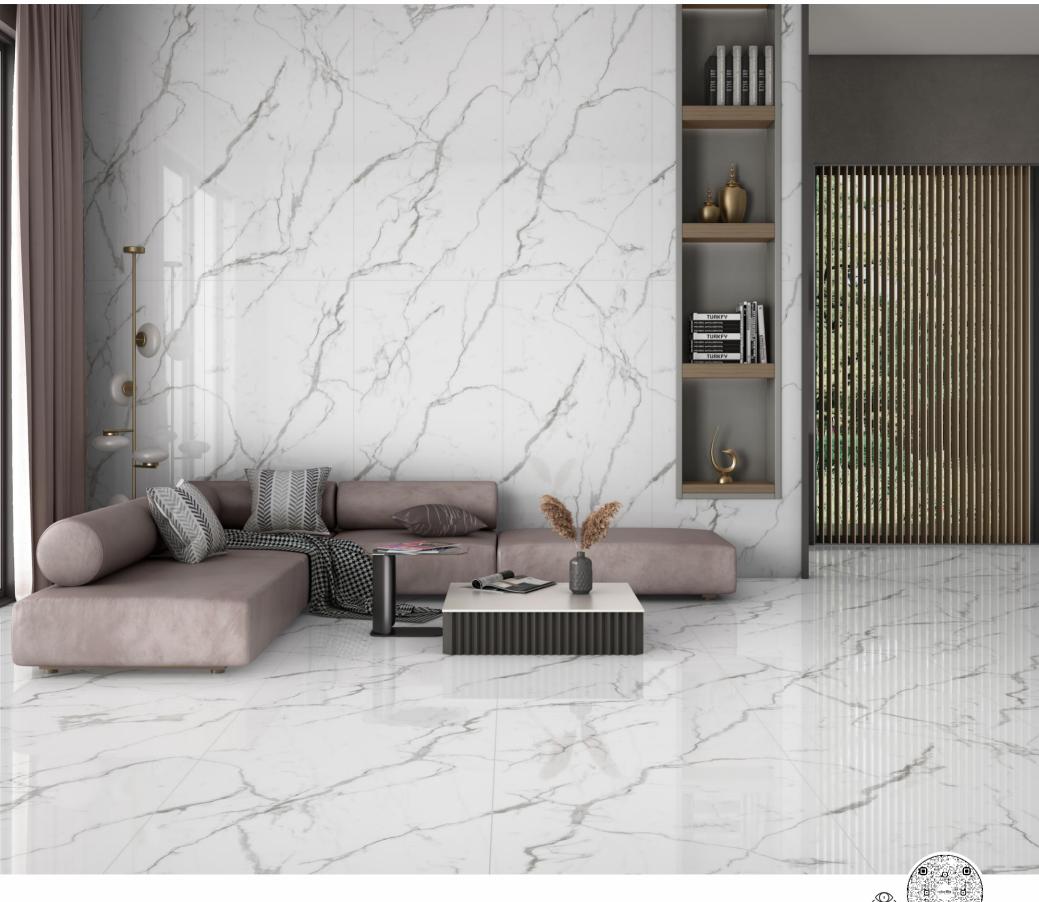


- GLOSSY
- RUSTIC CARVING







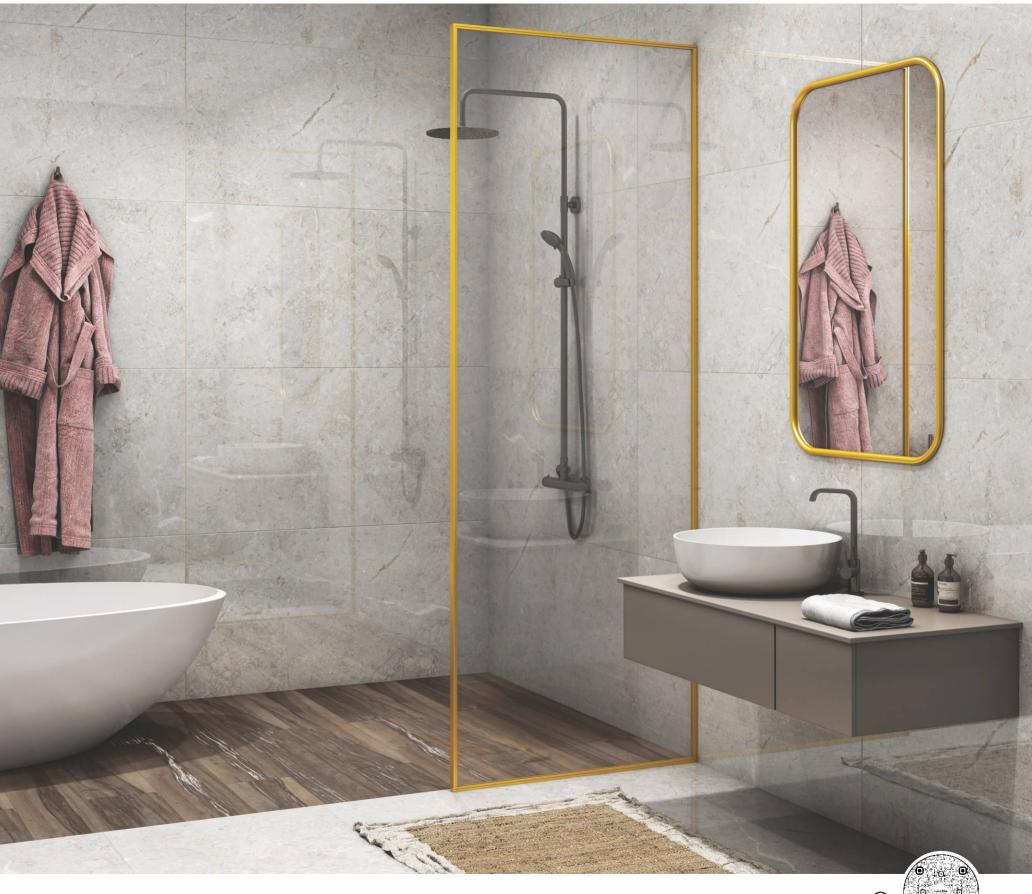

FLOOR



- GLOSSY
- RUSTIC CARVING



Hordix Gris







- GLOSSY
- RUSTIC CARVING



Hordix Pearl



6 - R





- RUSTIC CARVING
- GLOSSY




Hordix Camel



6 - R



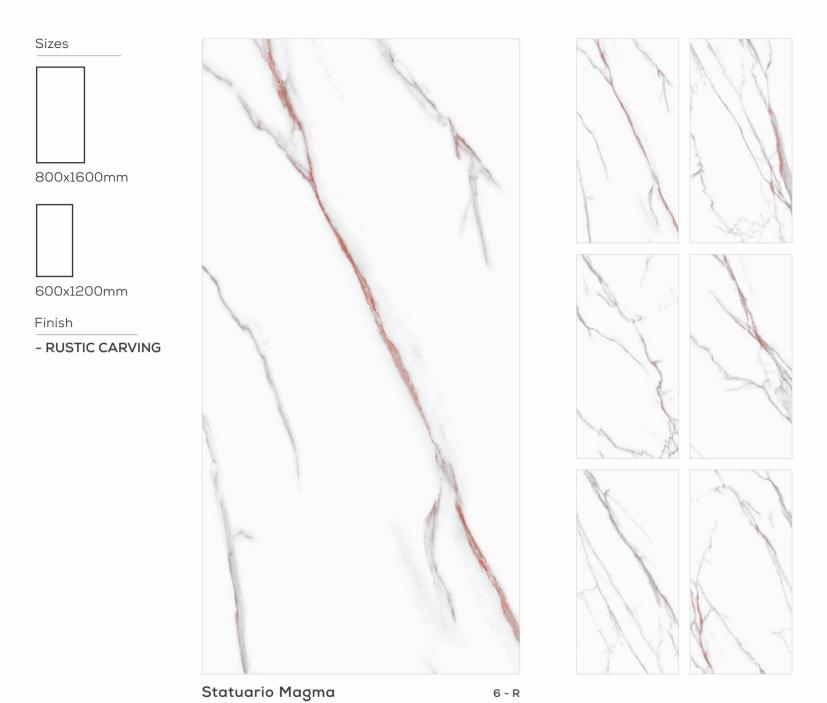







Finish


- RUSTIC CARVING

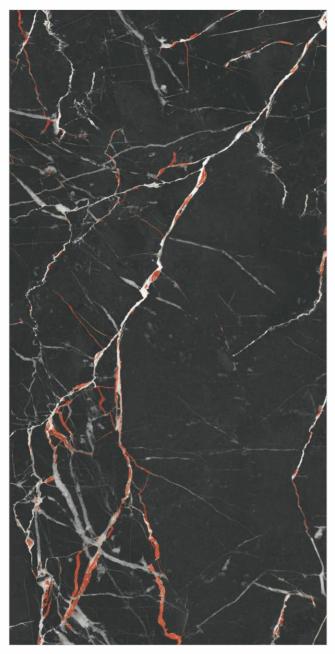


4 - R



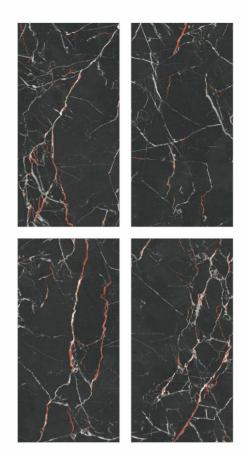

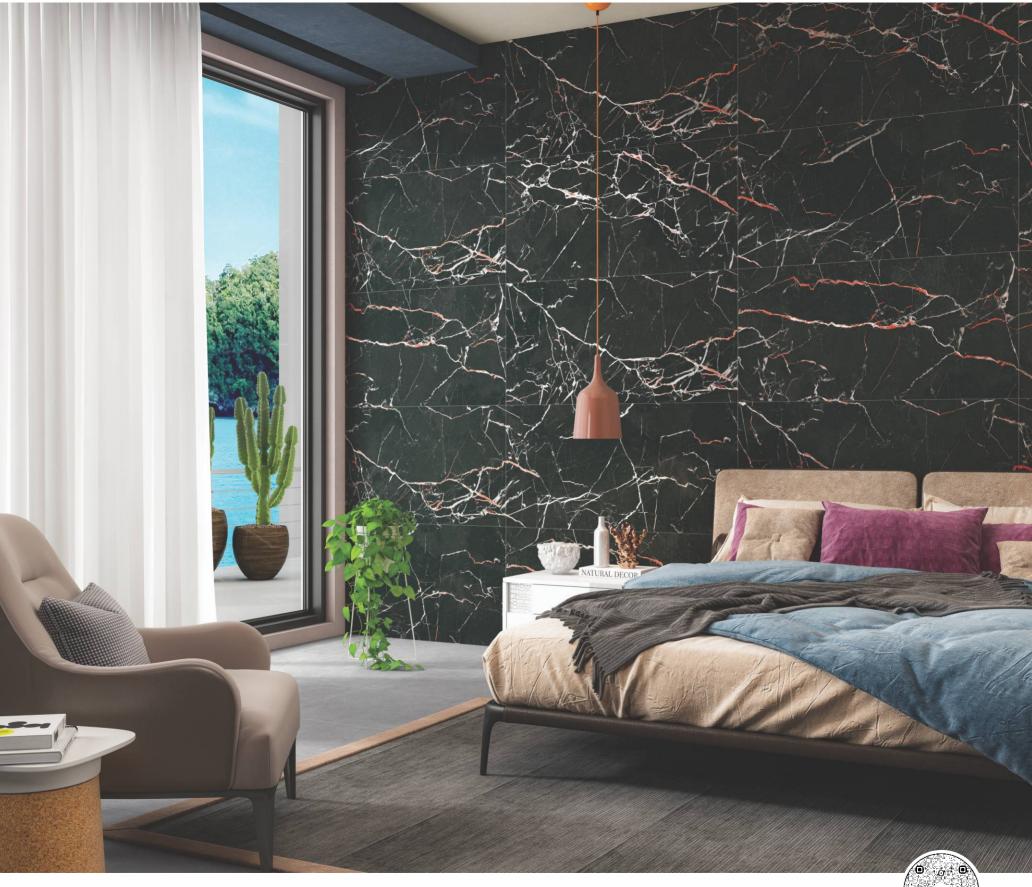

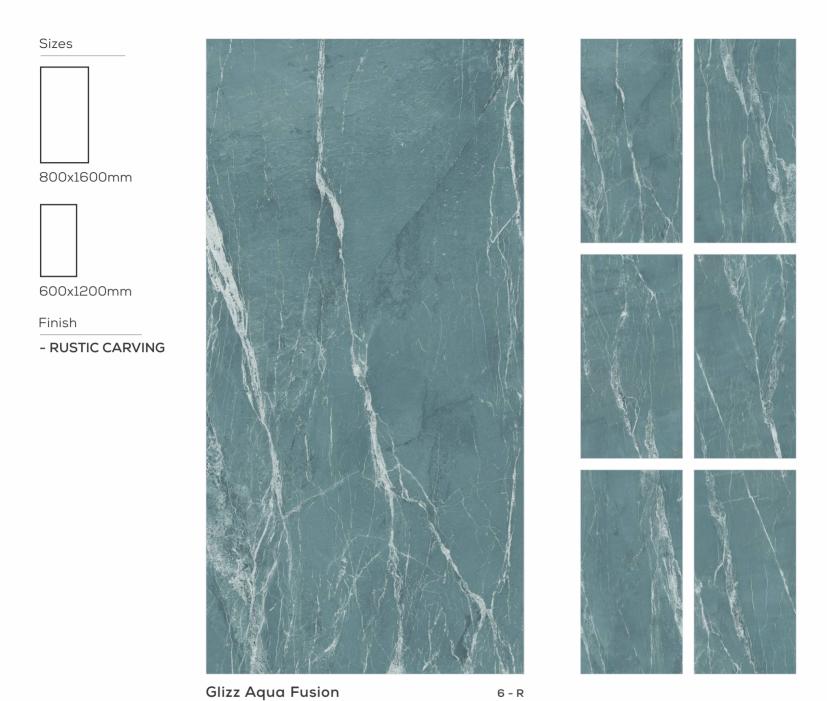



Sizes 800x1600mm 600x1200mm Finish - RUSTIC CARVING

6 - R

Glizz Ice Age





Finish

- GLOSSY











Finish

- GLOSSY



Saran Collin Camel









Finish

- GLOSSY



Saran Collin Gris

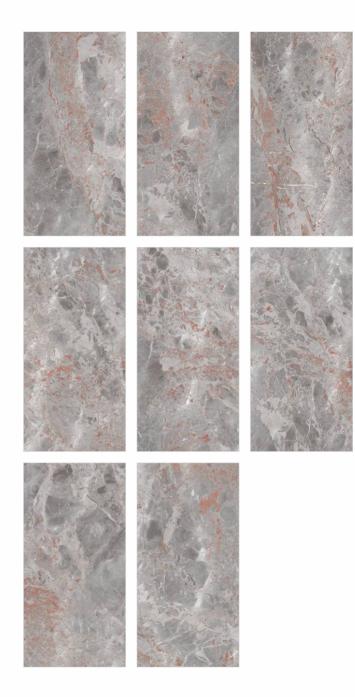

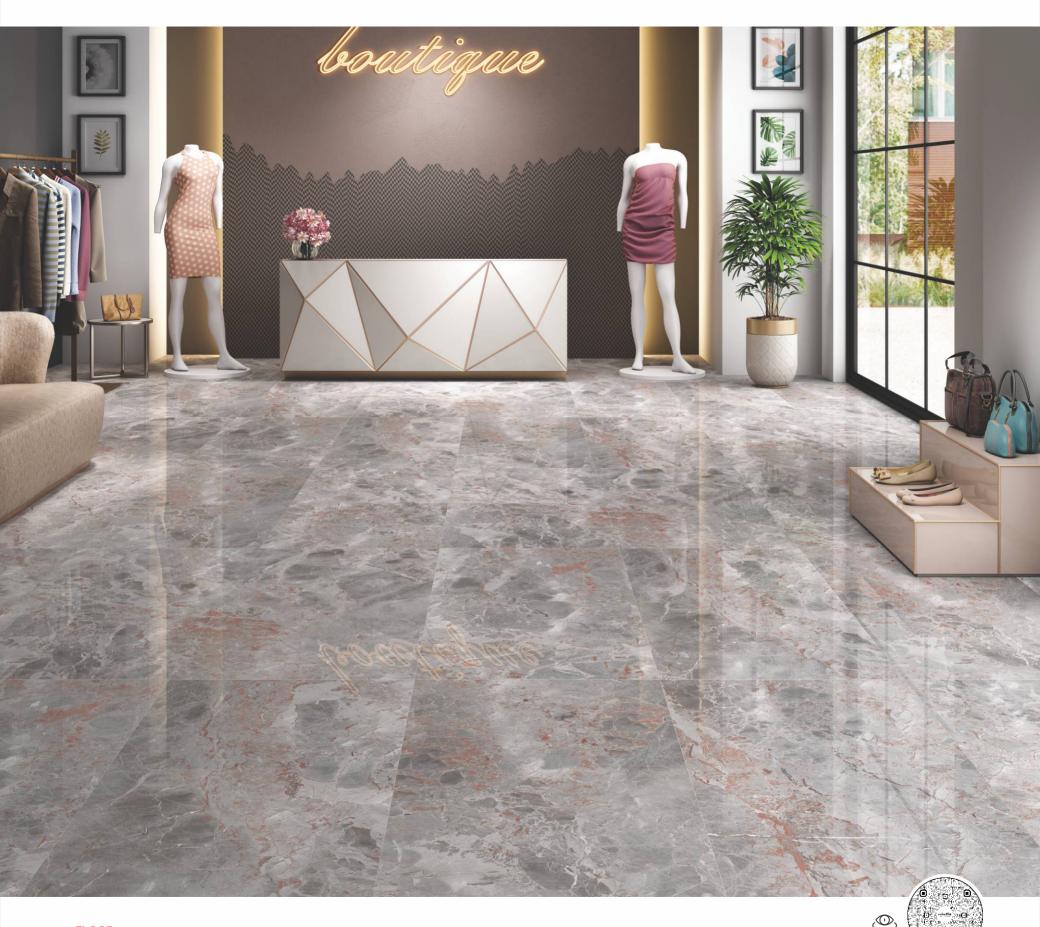

Sizes 600x1200mm Finish - GLOSSY





5 - R








Finish

- HIGH GLOSS (BLACK PANTHER)



Onyx Prime Gris

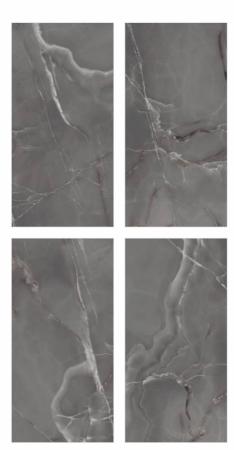





Finish

- HIGH GLOSS (BLACK PANTHER)



Onyx Prime Viola









Finish


- HIGH GLOSS (BLACK PANTHER)




Onyx Prime Verde

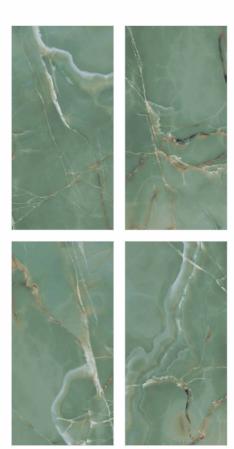

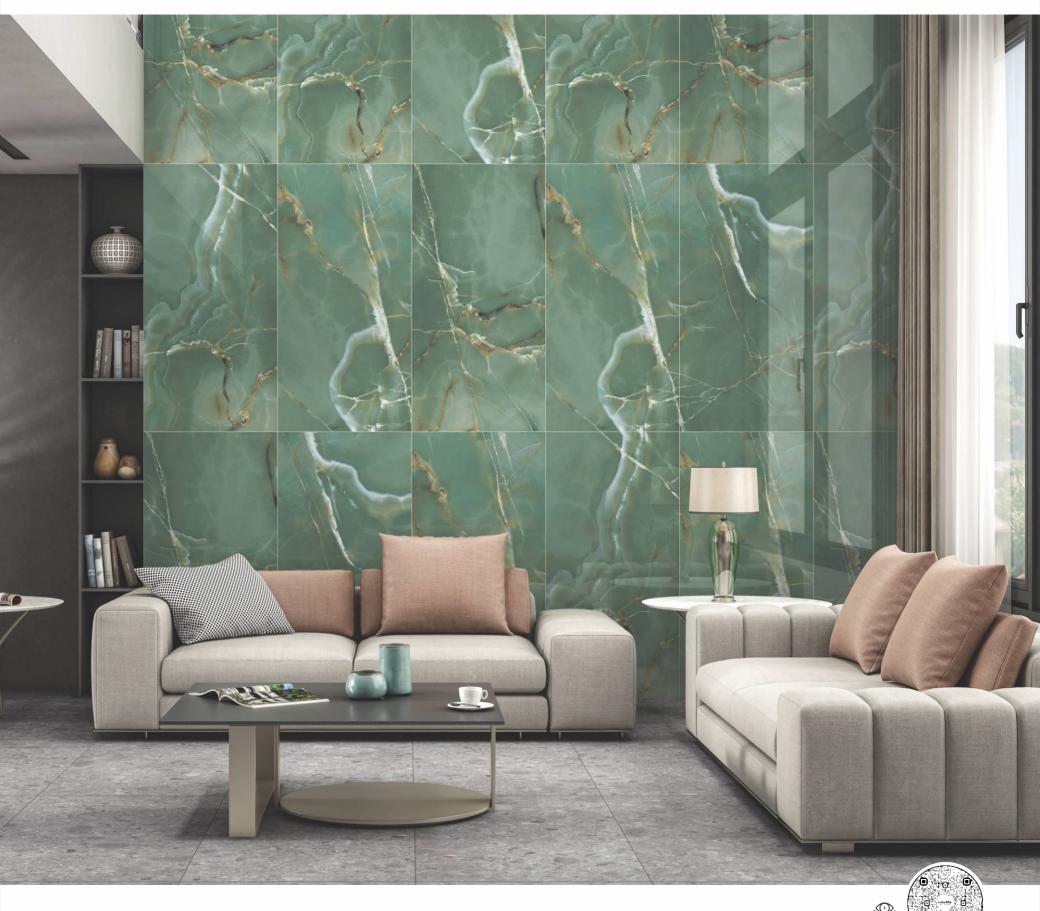


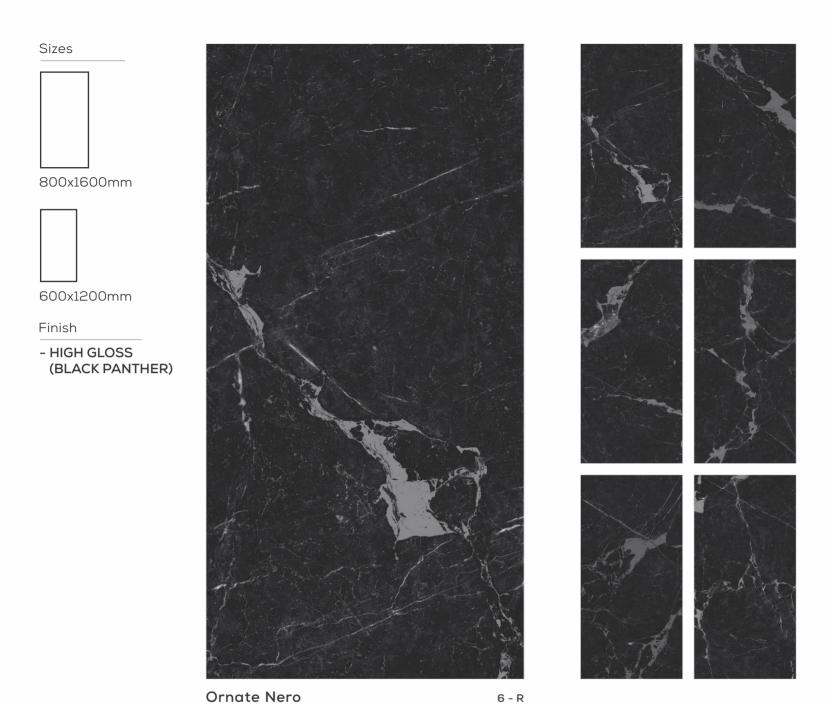



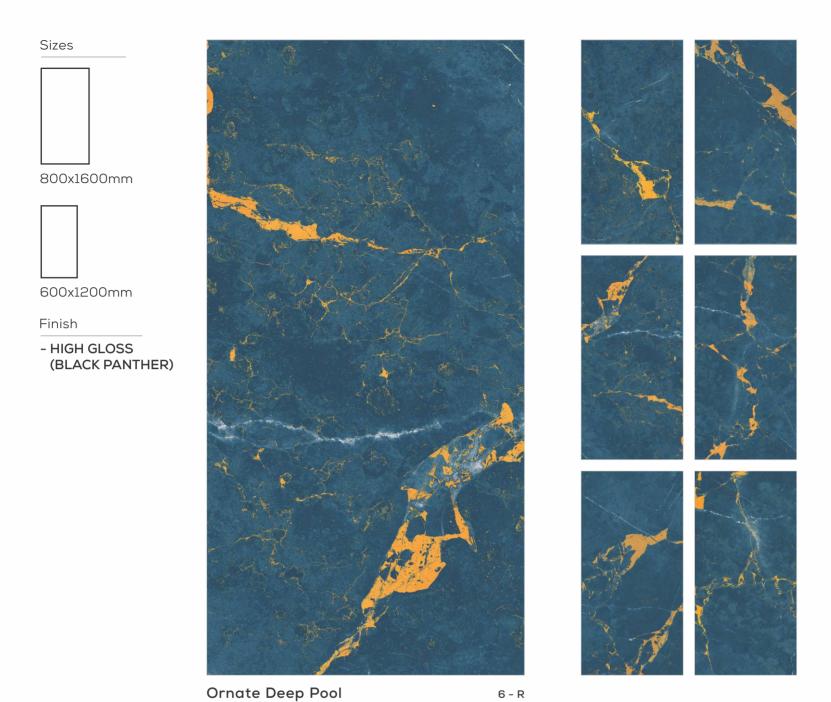



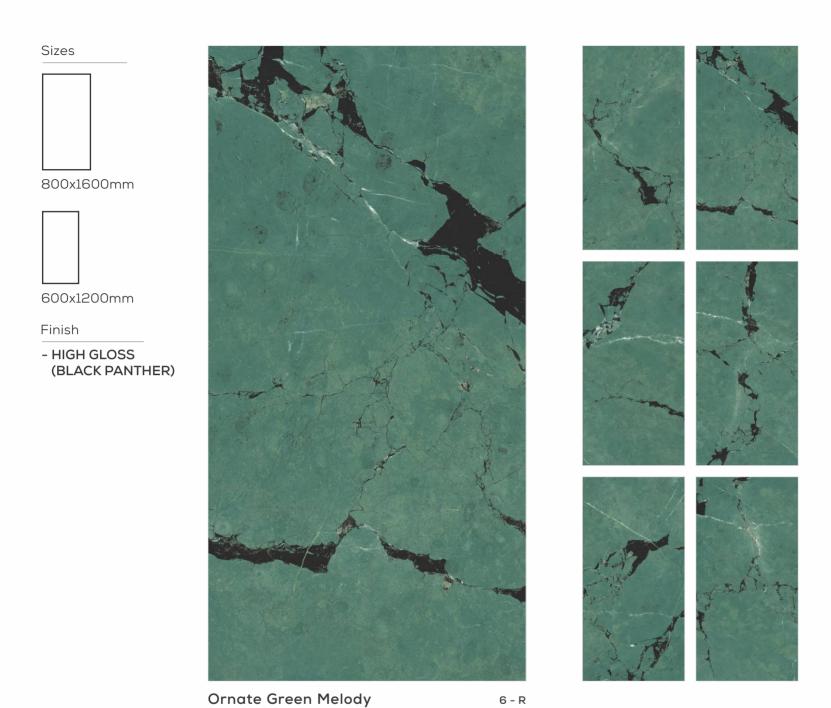



Colortile Quality Standards
Standards according to ISO 13006: Annex G - EN 14411: Annex G. Dry - Pressed Ceramic Tiles. Group Bla (Eb ≤ 0.5%)

| Technical Feature | Test | Require | ements | Colortile Values | | | | |
|---|-----------------------|----------------------------|--|-------------------------------|-------------------------|--|--|--|
| recnnical Feature | Method | % | mm | % | mm | | | |
| A. Dimensions and Surface Quality | | | | | | | | |
| Length and Width | | ± 0.6% | ± 2.0 | ± 0.20% | ± 1.0 | | | |
| Thickness | | ± 5.0% | ± 0.5 | ± 4.00% | ± 0.4 | | | |
| Straightness of Sides | UNI EN ISO 10545-2 | ± 0.5% | ± 1.5 | ± 0.20% | ± 1.0 | | | |
| Rectangularity | | ± 0.5% | ± 2.0 | ± 0.20% | ± 1.2 | | | |
| Surface Flatness a) Centre curvature b) Edge curvature c) Warpage | | ± 0.5% ± 0.5% ± 0.5% | ± 2.0 ± 2.0 ± 2.0 | ± 0.10% ± 0.10% ± 0.10% | ± 0.8 ± 0.8 ± 0.8 | | | |
| Surface Quality | | from visible defects t | the tiles shall be free that would impair the major area of tiles. | Compliant | | | | |

B. Physical Properties

| Water Absorption | UNI EN ISO 10545-3 | Eb ≤ 0.5% Individual maximum : 0.6% (absorbed water mass) | Eb≤0.1% (absorbed water mass) | |
|---|------------------------|---|--|--|
| Breaking Strength | UNIEN | Min. 1300 N | ≥ 1700 N | |
| Modulus of Rupture | ISO 10545-4 | Average minimum 35 N/mm² Individual minimum 32 N/mm² | ≥ 37 N/mm² | |
| Frost Resistance | UNI EN ISO 10545-12 | Required | Compliant | |
| Coefficient of Linear Thermal Expansion From Ambient Temperature to 100°c | UNI EN ISO 10545-8 | Required | 6 x 10 ⁻⁶ K ⁻¹ max | |
| Scratch Hardness (Mohs scale) | EN 101 | Declared by the producer | 3 to 6 Depends on Finish & Color | |
| Crazing Resistance | UNI EN ISO 10545-11 | Declared by the producer | 4 Cycle Pass | |

C. Chemical Properties

| Resistance to Staining | UNI EN ISO 10545-14 | Minimum Class 3 | 5 |
|---|------------------------|-----------------|-----|
| Resistance to Household Chemicals and Swimming Pool Salts | | Minimum GB | GA |
| Resistance to Low Concentrations of Acids and Alkalis | UNI EN ISO 10545-13 | To be reported | GLA |
| Resistance to High Concentrations of Acids and Alkalis | | To be reported | GHA |

Note: Colours shown are as accurate as the limitations of the printing results on paper are possible. Prospective customers are advised to inspect a sample of the tile before placing the order. Every effort has been taken to ensure the accuracy of the information given. However, the company reserves its right to change/alter the specifications without any prior notice. Sometime shade variation or size variation may occur, as this is inherent property of ceramic tile industry. Before fixing the tiles, all are advised to follow the laying instructions printed on the corrugated box of the tile. Company does not take/carry any responsibility of what so ever nature, once tiles are laid.

Standard Pallet Packing

| Pallet Type | Size | Thickness (Approx.) | pcs / Box | m² / Box | kg / Box (Approx.) | Box / Pallet | m² / Pallet | Pallet Size |
|-------------|------------|------------------------|-----------|---------------|-----------------------|--------------|----------------|-------------|
| А | 600x1200mm | 9.0mm | 2 pcs | 1.44 Sq. Mtr. | 29.30 kg | 68 | 97.92 Sq. Mtr. | 1100x1100mm |
| В | 600x1200mm | 9.0mm | 2 pcs | 1.44 Sq. Mtr. | 29.30 kg | 26 | 37.44 Sq. Mtr. | 675x1200mm |
| С | 600x1200mm | 9.0mm | 2 pcs | 1.44 Sq. Mtr. | 29.30 kg | 29 | 41.76 Sq. Mtr. | 750x1200mm |

Euro Pallet Packing

| Pallet Type | Size | Thickness (Approx.) | pcs / Box | m² / Box | kg / Box (Approx.) | Box / Pallet | m² / Pallet | Pallet Size |
|-------------|------------|------------------------|-----------|---------------|-----------------------|--------------|----------------|-------------|
| А | 600x1200mm | 9.0mm | 2 pcs | 1.44 Sq. Mtr. | 29.30 kg | 30 | 43.20 Sq. Mtr. | 800x1200mm |

Packing Details

| Size | Thickness (Approx.) | pcs / Box | m² / Box | kg / Box (Approx.) |
|------------|------------------------|-----------|---------------|--------------------|
| 600x1200mm | 9.0mm | 2 pcs | 1.44 Sq. Mtr. | 29.30 kg |



Color Granito Pvt. Ltd.

At. Ratavirda Village, Sartanpar Road, Tal. Wankaner - 363 621, Dist. Morbi, Gujarat, INDIA

Cell: +91 95120 08815

info@colortile.in | www.colortile.in

